

35TH AVENUE NORTH FLOOD MITIGATION PROJECT

STORM WATER AND SEWER IMPROVEMENTS, SUMMER, 2024

Project Overview


Minneapolis Public Works plans to construct flood mitigation measures. The project will replace aging storm water pipes in the Cleveland Neighborhood. Streets in this neighborhood flood as often as every other year. Some homes have flooded in the past and residents have reported damage. Installing new storm water pipes will reduce flood risk and improve climate resilience. Public Works will consult residents on improvements for walking, rolling, and driving. Construction is anticipated to begin in late 2025 and conclude in late 2026.

Project Goals

- Reduce flooding of streets and houses for frequent and severe rainfall events.
- Recommend a design layout that improves climate resilience of the area. The design will manage storm water runoff amounts and increasing rainfall intensity.
- Consult residents on priorities for using streets, sidewalks, and green space. These uses will be balanced with water quality needs.

Learn More

To learn more about the project and receive updates, visit the project webpage and subscribe through the GovDelivery email subscription service by entering your email. You may also contact the project manager, Matt Allie, 612.673.2419

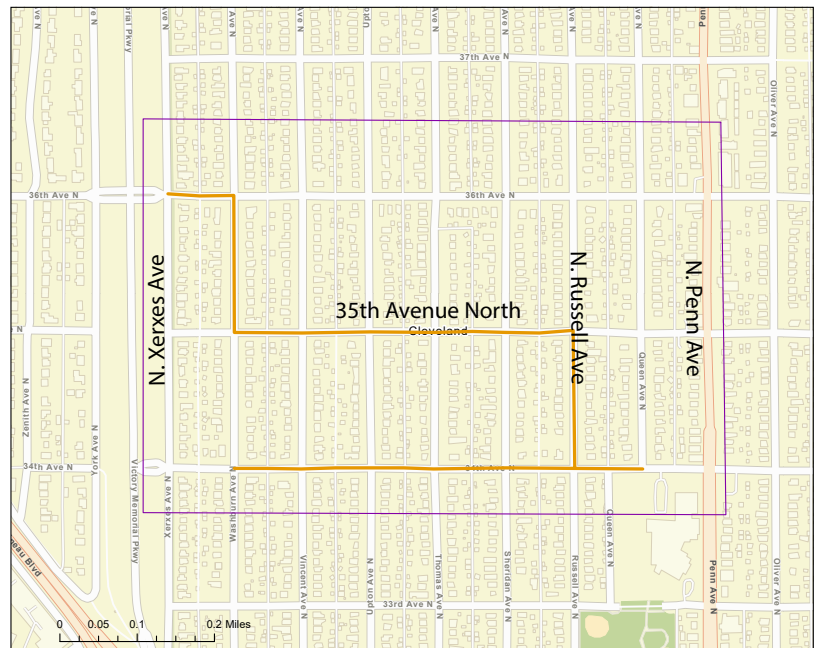

Map Symbols

- Project Corridor
- Project Area

Project Timeline




If you need this material translated or in an alternate format, please call 311

Hmong - Ceeb toom. Yog koj xav tau kev pab txhais cov xov no rau koj dawb, hu (612) 673-2800
 Spanish - Atención. Si desea recibir asistencia gratuita para traducir esta información, llame al teléfono (612) 673-2700
 Somali - Ogow. Haddii aad dooneyso in lagaa kaalmeeyo tarjamadda macluumaadkani oo lacag la'aan wac (612) 673-3500

Existing Design Storm (4.3" of rain over 24-hours)

The map below shows the estimated flood extents for the existing design storm event within the Cleveland Neighborhood. This storm event has a 10 percent annual probability of occurring. Flood mitigation treatments implemented through this project will not increase the flow or volume of water to Crystal Lake and will not impact flooding downstream.

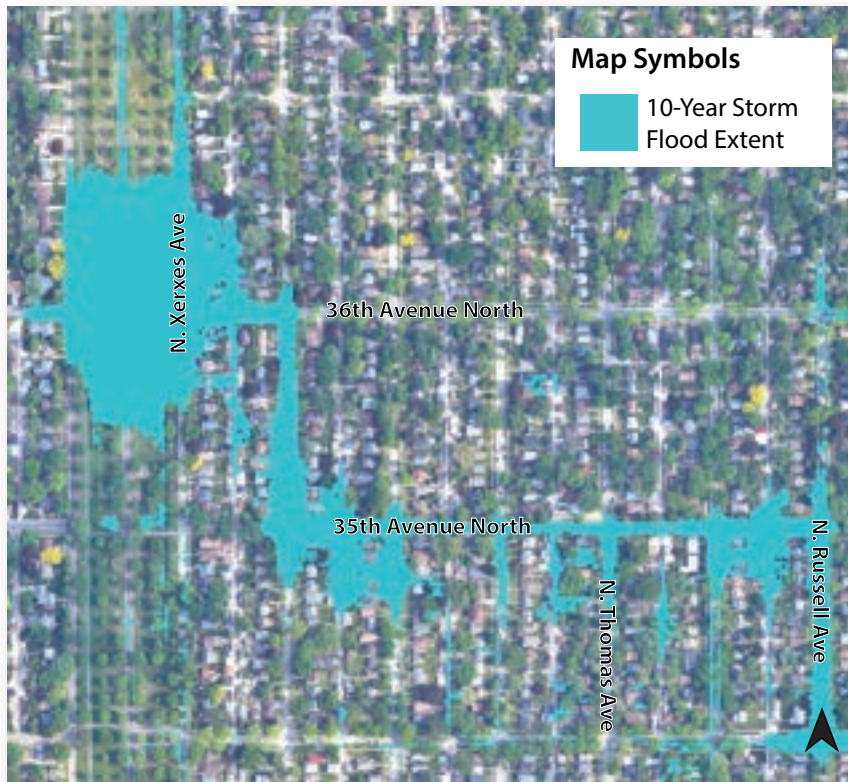

Upcoming Pop-Up Events

Community feedback is critical to the success of this project. Please provide your feedback at two upcoming pop-up events in the neighborhood to provide your feedback on the project goals and street treatments.

Monday, June 24th
6-7 PM
35th and Xerxes Ave

Saturday, June 29th
12PM (Noon)-1 PM
35th and Xerxes Ave



Check the project website for the latest information about the project and ways to stay involved.

Existing Conditions

35th Avenue has a Right of Way (ROW) width of 60 feet and curb-to-curb width is approximately 31 feet. The existing roadway is two-way and includes two on-street parking lanes. The project will aim to minimize impacts to trees, boulevards, and sidewalks.

